

SSL-WPLED




SSL-WPLED

Product Description

The SSL-WPLED is ideal for low bay, linear surface, suspended, outdoor, indoor, retail, industrial, parking garage, carport, parking structures, warehouses, breezeways, canopies, schools and much more.

Features

- The SSL-WPLED unique three piece design that allows effortless assembly without any tools.
- Diffuser: 100% UV stabilized polycarbonate diffuser eliminates glare and is integrated with crystals that enhance even light distribution.
- Housing: 100% UV stabilized polycarbonate housing, liquid silicone perimeter gasket.
- Mounting: Surface mount standard.
- The SSL-WPLED is corrosion, flame and vandal resistant.
- Weight: 10 lbs. / 4.5 kg.

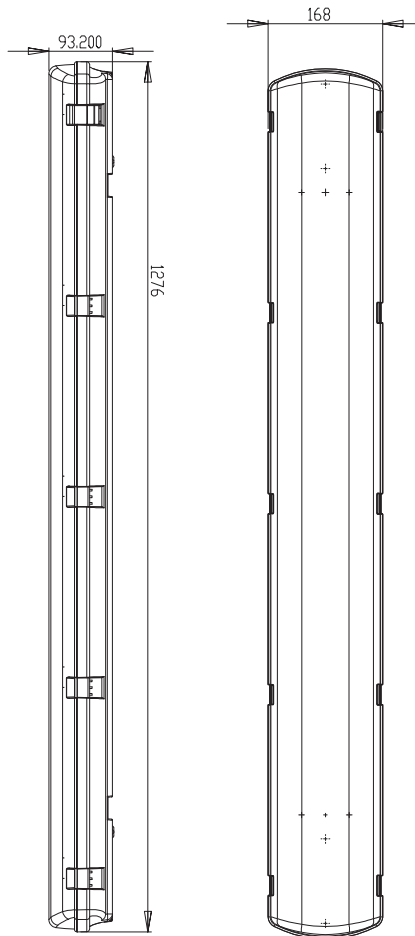

Performance Summary

SSL-WPLED/4X13 42W 69W

Efficacy	> 103LPM
Lumens	4400lm 7190lm
Chip	Samsung or Seoul
CRI	Ra>80
CCT Options	4000K or 5000K
Driver	OSRAM or PHILIPS etc.
THD	<20%
PF	>0.9
Driver Efficiency	>85%
Temperature Limited	Designed to operate up to 45°C / 113°F and below room side and plenum side
Standard Lifetime	Designed minimum 50,000 hours
Mounting	Surface or Pendant
Standard Warranty	5 years

Model Number	Input Power	Lumens	CCT	Volt
SSL-WPLED/4X13/40	42W	4400lm	4000K	120 - 277V
SSL-WPLED/4X13/50	42W	4400lm	5000K	120 - 277V
SSL-WPLED/4X22/40	69W	7190lm	4000K	120 - 277V
SSL-WPLED/4X22/50	69W	7190lm	5000K	120 - 277V



517 Monterey Pass Road • Monterey Park, CA 91754
 P: +1.626.401.1228 • F: +1.626.401.1220
 sales@sunstarslighting.com • www.sunstarslighting.com

