

SSL-PLED SERIES



SSL-PLED2X2



SSL-PLED2X4

Product Description

The new SSL-PLED Architectural fixture adopts the latest in optical and LED technology for use in many commercial applications. The SSL-PLED provides a single pleasant volumetric soft light that fills any interior space, giving it a larger, brighter, and more productive ambiance. The delivered comfortable and evenly distributed light eliminates surface shadows and ensures a glare-free environment perfect for offices, schools, multipurpose rooms, hospitals and most interior spaces. With a CRI of 80+ and a great thermal management design, the SSL-PLED lay-in will be the perfect fit for any application.

Features


- Die formed 20-Gauge cold-rolled steel housing.
- Samsung LED Chips.
- 5-year warranty.
- Dimmable driver.

Mounting


Our LED High Bay can be suspended from the ceiling by either AYC or EYE chain, Aircraft cable or it can be mounted on the ceiling directly.

Installation Recommendation

- Office
- Retail
- Commercial
- SSL-SLED
- HB-4T5
- IB-HB-6/T5

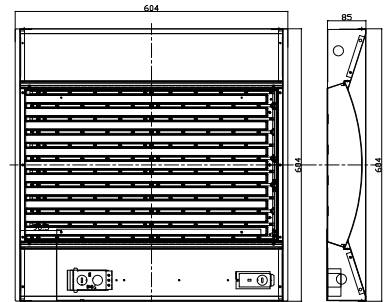

SSL-PLED2X2

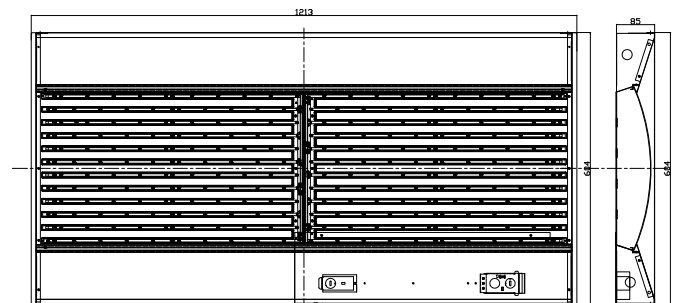

SSL-PLED2X4

Model Number	Input Power	Lumens	CCT	Dimensions	Volt
SSL-PLED2X2-L/35	26W	2766lm	3500K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X2-L/40	26W	2766lm	4000K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X2-L/50	26W	2766lm	5000K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X2-H/35	34W	3609lm	3500K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X2-H/40	34W	3609lm	4000K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X2-H/50	34W	3609lm	5000K	23.78" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-L/35	38W	4138lm	3500K	47.71" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-L/40	38W	4138lm	4000K	47.71" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-L/50	38W	4138lm	5000K	47.71" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-H/35	44W	4660lm	3500K	47.71" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-H/40	44W	4660lm	4000K	47.71" x 23.78" x 3.3"	120 - 277V
SSL-PLED2X4-H/50	44W	4660lm	5000K	47.71" x 23.78" x 3.3"	120 - 277V