

SSL-TRLED SERIES



SSL-TRLED

Product Description




The SSL-TRLED illuminates any work space without the glare of LED diodes, and feature impressive energy efficiency. The LED light fixtures come equipped with long lasting LED drivers, assuring consistent color temperatures. The SSL-TRLED models are compatible with building controls, motion sensors, timers, and daylight harvesting systems. These fixtures are available in 2' x 2' and 2' x 4' frames.

Recommendations:

- LED-DI
- LED-PL
- SSL-PLED

Installation:

- Indoor
- Ceiling
- Office
- Commercial

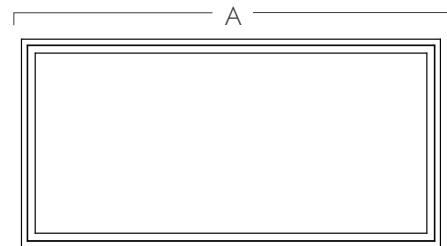

Model Number	Input Power	Lumens	CCT	Dimensions (A x B x C)	Volt
SSL-TRLED2X2/2X13/40	24W	2300lm	4000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X2/2X13/50	24W	2300lm	5000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X2/3X13/40	32W	3100lm	4000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X2/3X13/50	32W	3100lm	5000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X2/4X13/40	42W	4100lm	4000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X2/4X13/50	42W	4100lm	5000K	23.8" x 23.8" x 3.3"	100-277V
SSL-TRLED2X4/4X13/40	42W	4100lm	4000K	47.9" x 23.8" x 3.3"	100-277V
SSL-TRLED2X4/4X13/50	42W	4100lm	5000K	47.9" x 23.8" x 3.3"	100-277V