

WP-STD




WP-STD

The WP-STD is our Fluorescent Weather Fixture. This fixture is one of our most durable products, due to the housing being constructed with Polyethylene, durable plastic material, and a high impact acrylic diffuser. With its durable materials and design, the WP-STD can be used in extreme environments, including areas where moisture, dust and corrosion may be encountered. This fixture comes in two (2), three (3), and four (4) lamp options, as well as in two to eight foot frames. Not only is the body IP 65 rated, it features high light out-put ballast to maximum the efficiency. The WP-STD is UL listed and ETL certified.


WP-STD

Dimensions

WP-STD-2X17
WP-STD-2X32
WP-STD-4X32/8FT

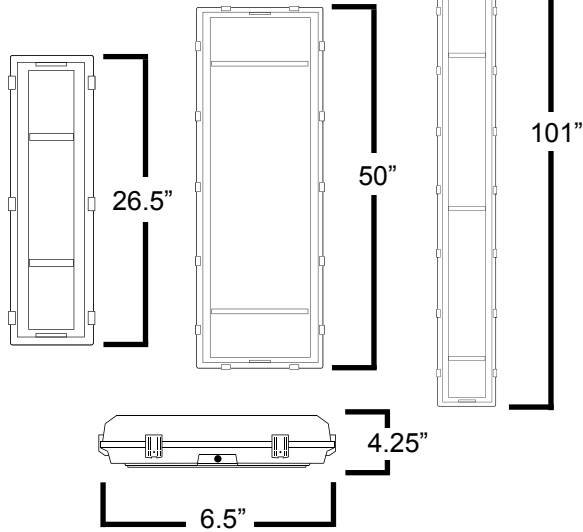

WP-STD-3X32/HIGHBAY
WP-STD-4X32/HIGHBAY

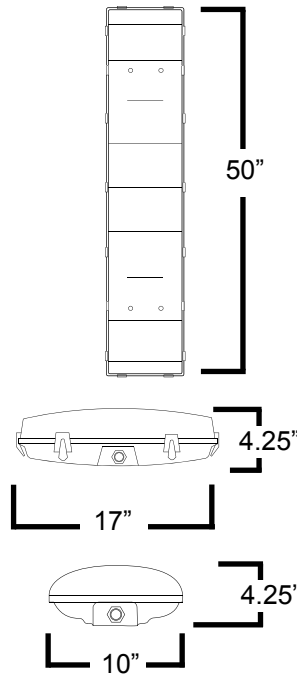

Mounting Options

- Chain Mount
- Surface Mount

Benefits

- High Performance Electronic Ballast Reduces Maintenance Cost
- Last Through Humidity, Dusty and Corrosive Areas
- IP65 Rated Fixture
- High Quality Electronic Ballast


Structure

- Stainless Steel Latches
- Clear Impact Resistant Acrylic Lens Diffuser
- High Quality Twist Lock Socket
- Polyethylene Housing


Warranty

2 Years Fixture
5 Years Ballast

WP-STD-254

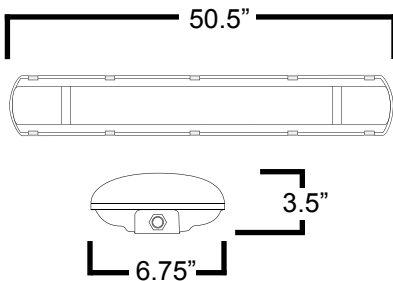

WP-STD-454

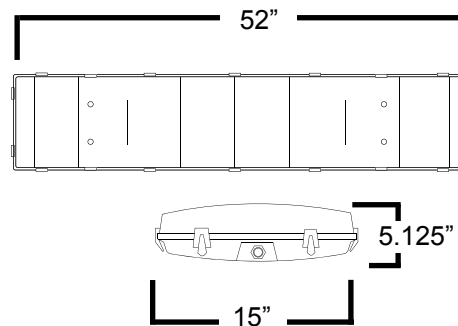

Model	Dimensions	Lamp QTY	Lamp Type	Watts	Volt
WP-STD-2X17	26.5"x6.5"x4.25"	2	T8	17W	120-277V
WP-STD-2X32	50"x6.5"x4.25"	2	T8	32W	120-277V
WP-STD-3X32/HIGHBAY	50"x10"x4.25"	3	T8	32W	120-277V
WP-STD-4X32/HIGHBAY	50"x17"x4.25"	4	T8	32W	120-277V
WP-STD-4X32/8FT	101"x6.5"x4.25"	4	T8	32W	120-277V
WP-STD-254	50.5"x6.75"x3.5"	2	T5	54W	120-277V
WP-STD-454	52"x15"x5.125"	4	T5	54W	120-277V

