

SSL-WRLED SERIES



Product Description

The SSL-WRLED series is our energy efficient LED downlight retrofit kit, which uses 85% less energy compared to incandescent. These LED downlights are suitable for use in wet locations, making it perfect for use in bathrooms and outdoor applications. Our SSL-WRLED series guarantees a 35,000 hour rated life.

Features:

- Constructed out of five stage iron.
- Built-in dimmable driver.
- 85% energy savings.
- 5-year warranty

Mounting


SSL-WRLED series is compatible with most 4, 5 or 6 inch recessed housing.

Installation


- Offices
- Retail Stores
- Schools
- Residential

Recommendation

- SSL-RLED
- SSL-RLED/AD
- SSL-ADRLED

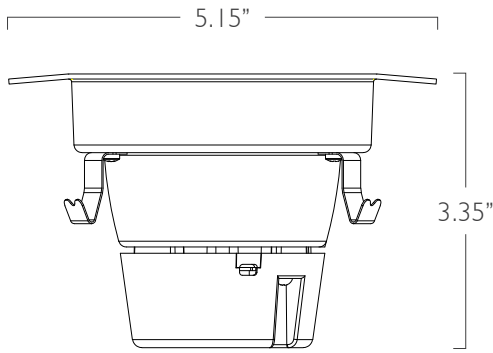

SSL-WRLED-12

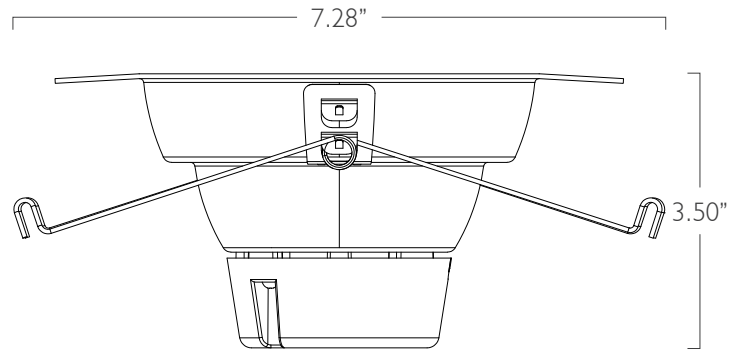

SSL-WRLED-19

Model Number	Dimensions	Lumens	Watts	CCT	Volt
SSL-WRLED-12/30	5.15" x 3.35"	900lm	12W	3000K	120V
SSL-WRLED-12/40	5.15" x 3.35"	900lm	12W	4000K	120V
SSL-WRLED-12/50	5.15" x 3.35"	900lm	12W	5000K	120V
SSL-WRLED-19/30	7.28" x 3.50"	1300lm	19W	3000K	120V
SSL-WRLED-19/40	7.28" x 3.50"	1300lm	19W	4000K	120V
SSL-WRLED-19/50	7.28" x 3.50"	1300lm	19W	5000K	120V