


# SSL-SLED SERIES




SSL-SLED

## Product Description

The small size of the SSL-SLED makes it an ideal choice for size restricted architectural applications. The SSL-SLED series can be the illumination solution in commercial, industrial, retail and residential applications. Fixture can be used in storage / utility areas, coves, display cases, shops, task and general area lighting.

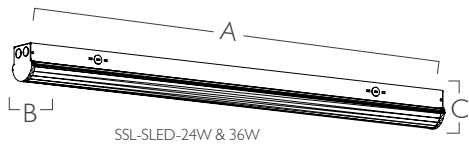

SSL-SLED-24W & 36W

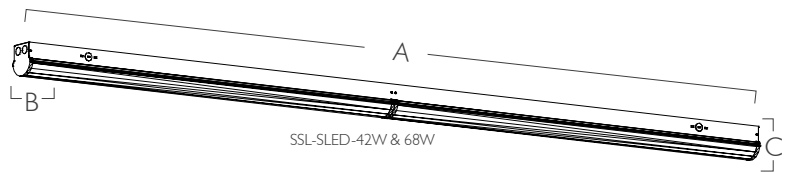

SSL-SLED-42W & 68W

## Performance Summary

### SSL-SRTFK SERIES

Efficacy	105LPM
Chip	Samsung LM561B
CRI	Ra > 80
Driver	Dimmable LED power supplies
THD	< 20%
PF	> 0.9
Driver Efficiency	> 85%
Temperature Limited	The product has applied for a type TL LED driver
Standard Lifetime	Designed minimum 50,000 hours
Mounting	Surface & Pendant
Standard Warranty	5 years
Input Voltage	120 - 277V

## Mounting

V-Chips: For dual point chain or cable hanging.



V-Clips

## Recommendations

- SSL-LBLED SERIES
- SSL-WRAP SERIES
- SSL-WPLED SERIES

Model Number	Input Power	Lumens	CCT	Dimension	Volt
SSL-SLED-24W/40-4FT	24W	2520lm	4000K	48" x 3.2" x 3.4"	120 - 277V
SSL-SLED-24W/50-4FT	24W	2520lm	5000K	48" x 3.2" x 3.4"	120 - 277V
SSL-SLED-36W/40-4FT	36W	3780lm	4000K	48" x 3.2" x 3.4"	120 - 277V
SSL-SLED-36W/50-4FT	36W	3780lm	5000K	48" x 3.2" x 3.4"	120 - 277V
SSL-SLED-42W/40-8FT	42W	4410lm	4000K	96" x 3.2" x 3.4"	120 - 277V
SSL-SLED-42W/50-8FT	42W	4410lm	5000K	96" x 3.2" x 3.4"	120 - 277V
SSL-SLED-68W/40-8FT	68W	7140lm	4000K	96" x 3.2" x 3.4"	120 - 277V
SSL-SLED-68W/50-8FT	68W	7140lm	5000K	96" x 3.2" x 3.4"	120 - 277V



517 Monterey Pass Road • Monterey Park, CA 91754  
 P: +1.626.401.1228 • F: +1.626.401.1220  
 sales@sunstarslighting.com • www.sunstarslighting.com

