


SSL-LFPLED SERIES



SSL-LFPLED

Product Description

LED Linear Luminaires are featured with slimness, elegance and soft lightness. It can be dimmed by 0 - 10V dimmer and installed as suspended and recessed. This product line is suitable for public areas such as hallway, school, hospital, and government etc.

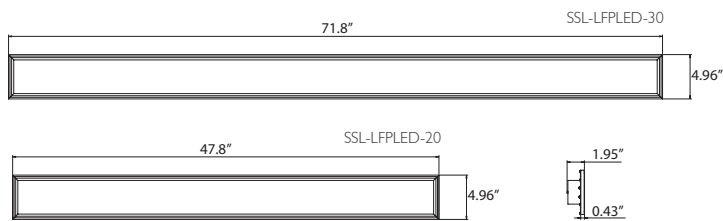

Performance Summary

SSL-LFPLED	20	30
Efficacy	103.47LPW	
Delivered Light Output	2073lm - 2126lm	2306lm - 2849lm
Input Power	20W	
CRI	Ra>80	
CCT Options	3500K, 4000K or 5000K	
Input Voltage	100 - 277V	
Input Current	0.2 - 0.072A	
THD	<20%	
Standard Warranty	10 years	
Standard Lifetime	Designed to L70 minimum 50,000 hours	
Mounting	Suspended	
Dimming	0 - 10V	
Power Factor	>0.9	

Model Number	Input Power	Lumens	CCT	Dimensions	Volt
SSL-LFPLED-20/35K	20W	2073lm	3500K	47.8" x 4.96" x 1.95"	100 - 277V
SSL-LFPLED-20/40K	20W	2109lm	4000K	47.8" x 4.96" x 1.95"	100 - 277V
SSL-LFPLED-20/50K	20W	2126lm	5000K	47.8" x 4.96" x 1.95"	100 - 277V
SSL-LFPLED-30/35K	30W	2306lm	3500K	71.8" x 4.96" x 1.95"	100 - 277V
SSL-LFPLED-30/40K	30W	2767lm	4000K	71.8" x 4.96" x 1.95"	100 - 277V
SSL-LFPLED-30/50K	30W	2849lm	5000K	71.8" x 4.96" x 1.95"	100 - 277V