


# SSLT8LED-DM SERIES



SSLT8LED-DM

## Product Description

The SSLT8LED-DM series is a dual mode LED T8 tube that is ballast compatible or direct connect. These dual mode LED T8 tubes come in full glass housing which provides wide beam angle and 300 degree even light distribution. The full glass housing prevents distortion and yellowing of the tube. The LED T8 tubes start up instantly with no delay and are rated for 50,000 hours. Our SSLT8LED-DM series can save up to 50% in energy cost compared to an equivalent fluorescent T8 lamp.

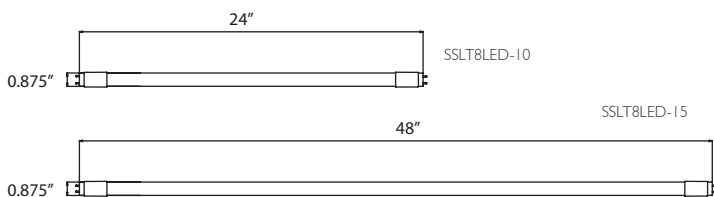

## Features:

- Wide beam design
- 50,000 hours of life
- Easy installation into standard T8 fixtures
- Instant turn on time with no flickering
- 5-year warranty
- Mercury free

## Installation:

- Schools
- Industrial Space
- Offices
- Hospitals

## Recommendation:

- T8 Lamp

Model Number	Input Power	Lumens	CCT	Dimension	Volt
SSLT8LED-10/30K-DM	10W	1100lm	3000k	24" x 0.875"	100-277V
SSLT8LED-10/40K-DM	10W	1150lm	4000k	24" x 0.875"	100-277V
SSLT8LED-10/50K-DM	10W	1150lm	5000k	24" x 0.875"	100-277V
SSLT8LED-15/30K-DM	15W	1650lm	3000K	48" x 0.875"	100-277V
SSLT8LED-15/40K-DM	15W	1800lm	4000K	48" x 0.875"	100-277V
SSLT8LED-15/50K-DM	15W	1800lm	5000K	48" x 0.875"	100-277V